




EXTRUSION MOLDING SERIES

挤出成型主机配套

同向双螺杆主机在挤出成型领域的应用很广，包括PET片材、PC片材、ABS片材、PS片材、EVA胶膜、POE胶膜、PVB胶膜、PP片材、防水卷材等等。

The machine widely application to extrusion molding field, including PET sheet, PC sheet, ABS sheet, PS sheet, EVA film, POE film, PVB film, PP sheet, waterproof rolling material, etc.

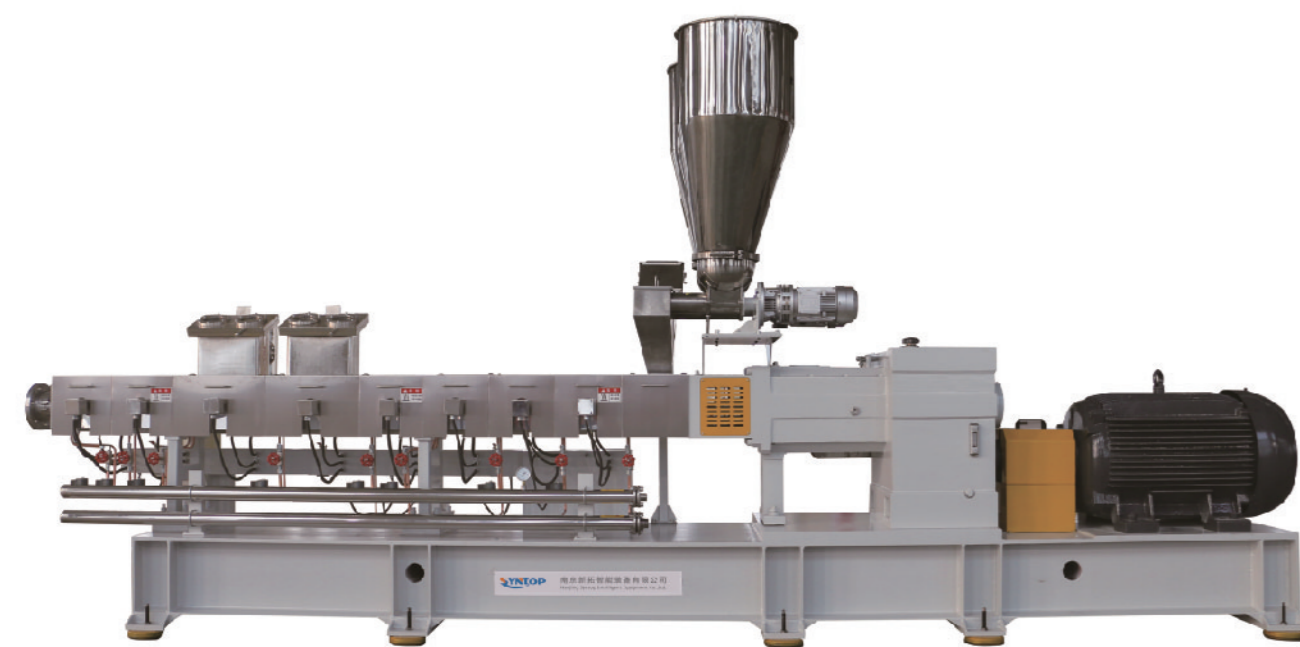

主机型号 Model	长径比 L/D	转速 Speed	产量 Capacity
XTS75	40-48	100--500rpm	300--800kg/h
XTS85	40-48	100--500rpm	500--1000kg/h
XTS95	40-48	100--500rpm	500--1500kg/h
XTM110	40-48	100--500rpm	800--2000kg/h
XTM135	40-48	100--500rpm	1000--3000kg/h

备注：以上规格参数如有变更，恕不另行通知。
Note: The specifications are subject to change without prior notice.



南京新拓智能装备有限公司 Nanjing Syntop Intelligent Equipment Co.,Ltd.



地址：江苏省南京市溧水区白马镇茶兴路10号
Add: No. 10, Chaxing Road, Baima Town, Lishui District, Nanjing
电话 Tel: 025-56205358
传真 Fax: 025-56205358
邮箱 E-Mail: sales@syntop-ie.cn
网站 Http: www.syntop-ie.cn
手机 Mob: 18251868166; 13616129910; 15850391399



www.syntop-ie.cn

南京新拓智能装备有限公司 Nanjing Syntop Intelligent Equipment Co.,Ltd.

025-56205358

sales@syntop-ie.cn




KINDS OF COLOR MASTERBATCH SERIES

各类色母粒造粒成套生产线

色母主要是用来给高分子材料进行着色，主要分为黑色母、白色母、彩色色母及液体色母。

The masterbatch is mainly used for coloring polymers, and mainly calssified as black masterbatch, white masterbatch, color masterbatch and liquid masterbatch.

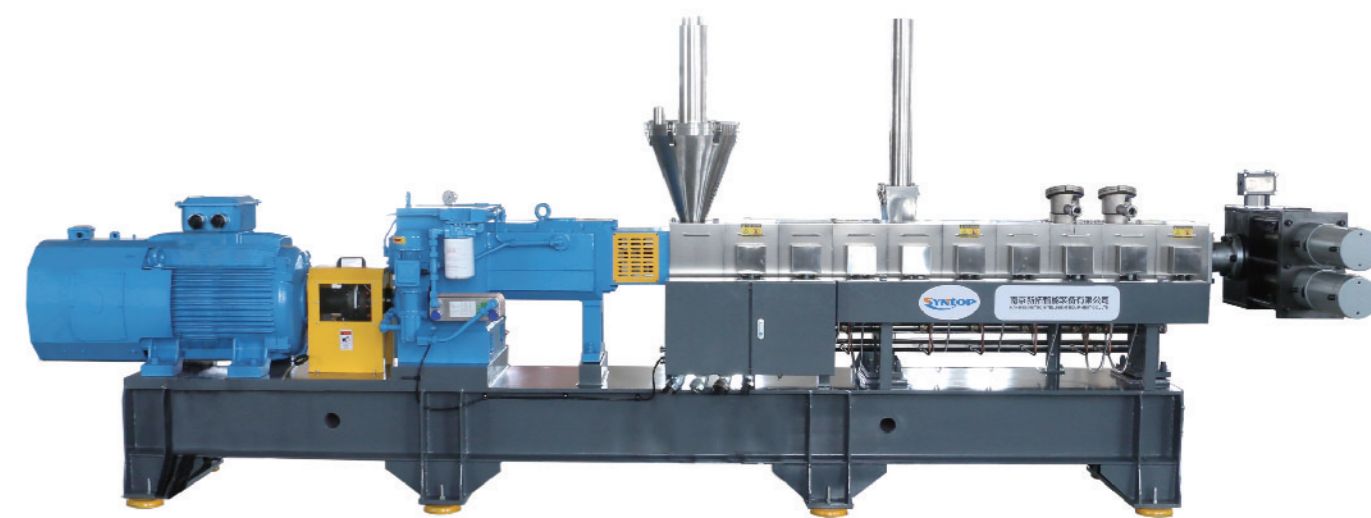

主机型号 Model	长径比 L/D	转速 Speed	产量 Capacity
XTM52	44-56	600--800rpm	300--500kg/h
XTM65	44-56	600--800rpm	400--800kg/h
XTM75	44-56	600--800rpm	500--1000kg/h
XTM95	44-56	500--600rpm	600--1500kg/h

备注：以上规格参数如有变更，恕不另行通知。
Note: The specifications are subject to change without prior notice.




ENGINEERING PLASTICS PELLETIZING SERIES

工程塑料造粒成套生产线

此应用为双螺杆配混应用的主要领域，可用于高分子着色改性、填充共混改性、以及其他各种力学、电学、热学、光学、耐环境及耐生物性能改性等。

This type main application to twin screw compounding filed, which can be used for polymer coloring, filling and blending, and also other mechanics, electrical, thermoplastics, optical, processability, and anti-environment and anti-biological function modification.

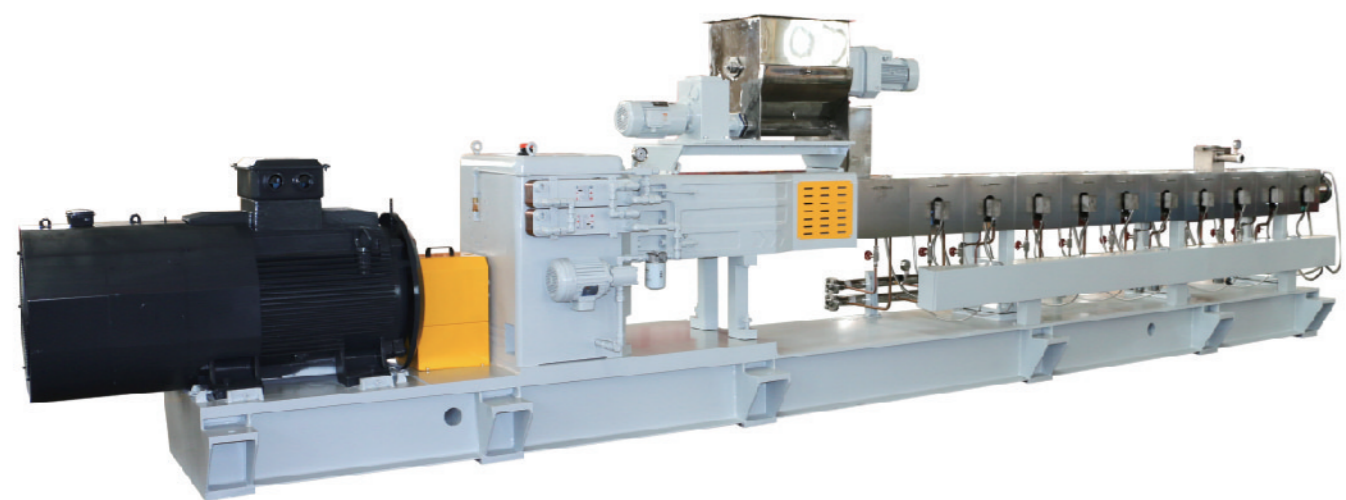

主机型号 Model	长径比 L/D	转速 Speed	产量 Capacity
XTM65	36-48	400--900rpm	300--800kg/h
XTM75	36-48	400--900rpm	500--1000kg/h
XTM95	36-48	400--900rpm	800--1500kg/h

备注：以上规格参数如有变更，恕不另行通知。

Note:The specifications are subject to change without prior notice.



THERMOPLASTIC ELASTOMERS SERIES

热塑性弹性体造粒成套生产线

热塑性弹性体为当前最有潜力的新材料之一，同时兼具塑料和橡胶的优点，广泛适用于汽车、电气、工程、医疗等其他领域。

Thermoplastics are the most potential new material at present, combining both advantages of plastic and rubber, which can be used in automobile, electronics, engineering and medical, etc.

·TPS ·TPU ·TPV ·TPEE ·TPO



主机型号 Model	长径比 L/D	转速 Speed	产量 Capacity
XTM65	48-64	300--600rpm	300--500kg/h
XTM75	48-64	300--600rpm	500--1000kg/h
XTM95	48-64	300--600rpm	1000--1500kg/h

备注：以上规格参数如有变更，恕不另行通知。

Note:The specifications are subject to change without prior notice.



TEST MACHINE

实验机

我公司长期跟各大院校、厂家进行技术交流，为他们提供功能更齐全的试验设备，表格中列出来的是目前两款主打的机型，性能稳定，操作简单。

Our company has established long-term cooperation with universities, in order to promote technical communication, provide them complete test equipment, listed in the table are the two main models, running stable and simple operation.



主机型号 Model	长径比 L/D	转速 Speed	产量 Capacity
XTM25	40-56	600--1200rpm	根据配方
XTM35	40-56	600--1000rpm	根据配方

备注：以上规格参数如有变更，恕不另行通知。

Note:The specifications are subject to change without prior notice.



HIGH FILLER PELLETIZING LINE WITH HIGH CAPACITY SERIES

大产量高填充造粒成套生产线

填充母料是由添加滑石粉，碳酸钙，高岭土、无机粉体与塑料载体、润滑剂，通过预混或多路失重喂料经双螺杆造粒，该母粒广泛用于聚乙烯、聚丙烯、聚氯乙烯、聚酯、ABS、PS、EVA、管材、编丝、薄膜、打包带、注塑、挤出等等塑料制品中，具有增强、增量、降低成本、提高耐热性、低碳环保。按材质成分可分为：PP碳酸钙填充母料，PE碳酸钙填充母料，滑石粉填充母料，透明填充母料

High Filler Masterbatch is made of talc, calcium carbonate, kaolin and other inorganic powder compounding with resin and lubricants through twin-screw pelletization.It is widely used in polyethylene, polypropylene, polyvinyl chloride, polyester, ABS, PS, EVA blown barrels, pipes, wire series, films, strapping, injection molding, extrusion and so on. High Filler Masterbatch has these properties;enhanced,incremental,reduce costs, improve heat resistance.low-carbon environment.

High Filler Masterbatch can be divided into: PP calcium carbonate filler, PE calcium carbonate filler, talc filler, transparent filler



主机型号 Model	长径比 L/D	转速 Speed	产量 Capacity
TXV77	36-56	400--900rpm	2000--3000kg/h
XTM95	36-56	400--900rpm	3000--3500kg/h

备注：以上规格参数如有变更，恕不另行通知。

Note:The specifications are subject to change without prior notice.